

The Survivor features a low-profile bezel that doesn't interfere with gear and equipment. A reinforced D-ring provides forward-hanging orientation. Safety-rated for Class I, Div. 1 environments.



Rubber dome push-button switch easy to use with gloves



Rugged nylon polymer body is virtually indestructible

Specialized optic combines low profile with strong performance and a wide beam

**DUAL POWER SOURCE:**  
Rechargeable NiMH battery also accepts (4) "AA" alkaline batteries

No tools needed to change batteries



<p>High, low, emergency flash and moonlight modes:</p> <ul style="list-style-type: none"> <li>– High for a super-bright, smoke piercing beam: 175 lumens; 405m beam distance; runs 3.5 hours (NiMH); runs 4 hours (alkaline)</li> <li>– Low for longer run time: 60 lumens; 237m beam distance; runs 13 hours (NiMH); runs 15 hours (alkaline)</li> <li>– Flash for signaling: runs 8 hours</li> <li>– Moonlight mode provides low-level lighting for battery conservation: runs 20 days</li> </ul> <p>Optimized electronics provide regulated intensity</p>
<p>Unbreakable polycarbonate lens with silicone anti-scratch coating is assembled in a heavy-duty bezel</p>
<p>IPX4-rated; water-resistant; 2m impact resistance tested</p>
<p>7.06 in. (17.92 cm); NiMH: 18 oz. (510g); Alkaline: 13.7 oz. (388g)</p>

Class I & II, Division 1, Groups C, D, E, F, G, Class III, T-Code: T4; Class I, Division 2, Groups A, B, C, D, T-Code: T4

Charger meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

Limited Lifetime Warranty  
Visit [streamlight.com](http://streamlight.com) for full warranty information

ORANGE	YELLOW	BLACK	DESCRIPTION
90505	90515	90525	Survivor - 230V AC/12V DC
90506	90516	90526	Survivor - 240V AC/12V DC
90503	90513	90523	Survivor - 120V AC/12V DC
90500	90510	90520	Survivor - without charger
90540	90541	90545	Survivor - alkaline

## SURVIVOR®

**DESCRIPTION:** The Survivor® is an intrinsically safe, lightweight, handheld flashlight with a right-angle head designed for use in hazardous locations. This light features a reduced bezel length to minimize snag hazards and a clip for attachment to turnout gear. Its large push-button provides gloved access to microprocessor-controlled high and low intensity modes, emergency flash, and moonlight mode. Smoke Cutter® optic technology offers insertable black or amber plugs for a user-customizable beam pattern.

**CASE MATERIAL:** Housing, base, and battery housing made from high-impact, super tough nylon offering exceptional durability. All openings are O-ring sealed for weather resistance. Spring-loaded clip with built-in D-ring easily attaches to belts and harnesses and reduces unwanted rotation. One-way valve for case venting. Available in international safety orange, high-visibility yellow, or black.

**DIMENSIONS:** Height: 7.06 in (17.9 cm)                      Width: 2.85 in (7.24 cm)                      Diameter: 2.32 in (5.89 cm)  
 Height in charger: 8.67 in (22.0 cm)  
 Grip area: Height: 3.6 in (9.14 cm)                      Width: 2.20 in (5.59 cm)                      Thickness: 1.35 in (3.43 cm)

**WEIGHT:** Ni-MH: 18.0 oz (510 g) \*                      Alkaline: 13.7 oz (388 g) \*

**LENS:** Unbreakable polycarbonate with silicone anti-scratch coating assembled in a heavy-duty bezel. O-ring sealed.

**LIGHT SOURCE:** High-power white LED, impervious to shock with a 50,000-hour lifetime.

**LIGHT OUTPUT:** See chart. Optimized electronics provide regulated intensity.



Custom "Total Internal Reflection" (TIR) optic for narrow beam and optimum peripheral illumination. Smoke Cutter® insertable black plug reduces peripheral illumination for improved smoke cutting ability or amber plug reduces eye fatigue.

**ON/OFF:** Ultrasonic welded push-button switch designed for extremely long life. Rubber dome push-button actuator provides easy operation even when wearing heavy gloves.

**RUN TIME:** See chart. All claims to 10% of initial lumen output. Flash: 8 hours continuous. Moonlight: 20 days continuous.


**BATTERY:** Industrial NiMH 4.8V, 2.6Ahr, 4 cell sub-C rechargeable up to 1,000 times. Optional four (4) AA alkaline battery pack provides fast replacement with readily available batteries.

**CHARGING:** 2.5-hour fast charger with full charge indicators, 12-hour smart charger with charge complete indicator or steady charger (100/230/240V systems only). All chargers can be used with 100V, 120V, 230V, 240V or 12V DC by exchanging its charge cord.

**FEATURES:**



Reduced bezel length to minimize snag hazards.  
 Updated clip design for easy attachment on turnout gear.  
 Customizable beam pattern using included black or amber optic plugs.  
 IPX4-rated design; water-resistant operation.  
 2-meter impact resistance tested.  
 Serialized for positive identification.

**APPROVALS\*\*:**  Class I, II, Division 1, Groups C, D, E, F, G; Class III, T-Code: T4  
 Class I, Division 2, Groups A, B, C, D; T-Code: T4

\*\* See product for specific ratings.

**NFPA** Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018).  
 Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position.









**CE UK** Meets applicable United Kingdom and European Community Directives.


**MSHA** Permissible Flashlight, Approval No. 20-A150001-0.

**BC** CEC Compliant (Fast and Smart charger models only)

**WARRANTY:** Streamlight's Limited Lifetime Warranty

**ACCESSORIES:** 5-Unit Bank Charger

	NiMH Rechargeable Battery			AA Alkaline Batteries		
	FL1 STANDARD	HIGH	LOW	FL1 STANDARD	HIGH	LOW
OUTPUT		175 LUMENS	60 LUMENS		175 LUMENS	60 LUMENS
RUN TIME		3h 30min	13h		4h	15h
DISTANCE		405m	237m		405m	237m
INTENSITY		41,000cd	14,000cd		41,000cd	14,000cd

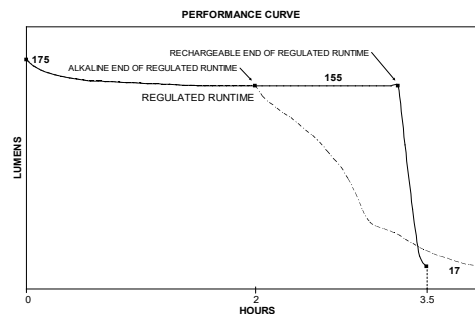

\* With battery (based on model; included in purchase)  
 All performance claims to ANSI/PLATO FL1-2019 Standard